




ϕ 2.5mm PVC & LSZH Fanout Tubing

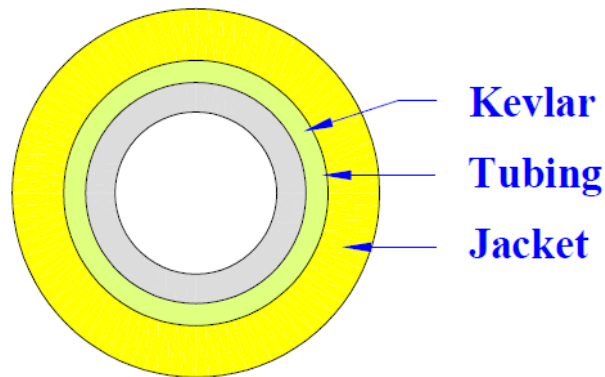

Cable Specification

Tubing Material	Tubing OD., mm	Tubing ID., mm	Cable Jacket Material	Cable Diameter, mm	Cable Jacket Thickness, mm
Hytrel	1.5±0.05	1.05~1.2	PVC or LSZH	2.5±0.15	0.3~0.5

Mechanical Properties

		Standard
Maximum Tensile Load - Loaded (N)	400	IEC 60794-1-2 E1
Maximum Tensile Load - Unloaded (N)	200	
Min. bend radius installed (mm)	60	IEC 60794-1-2 E11
Min. bend radius long term (mm)	30	
Storage Temperature	-40 to +85°C(PVC) / -20 to +70°C(LSZH)	IEC 60794-1-2 F1
Operating Temperature	-40 to +85°C(PVC) / -20 to +70°C(LSZH)	

These specifications are subject to change without prior notification.