


Simplex 2.0mm LSZH Fanout Tubing

FiTek's Simplex Fanout Tubing can provide superior extra protection for use with 250um fibers with aramid strength member inside to enhance the protection and strain-relief.



Specifications		
Inside/Outside Diameter of Buffer Tubing, um		650um+-50um / 900um+-50um
Material for Buffer Tubing		UL-94 V0 Hytrel
Cable Diameter, mm		2.0
Weight, kg/km		4.3
Max. Tensile Load	Load, N	200
	Unload, N	100
Min. Bend Radius	Load, cm	4
	Unload, cm	2
Applications		For the protection of 250 um fiber
Jacket Color		Yellow
Application Temperature	LSZH	-20 ~ +70°C
Crush Resistance		40 N/cm
Impact Resistnce		10 Impacts
Cyclic Flex Resistance		500 Cycles

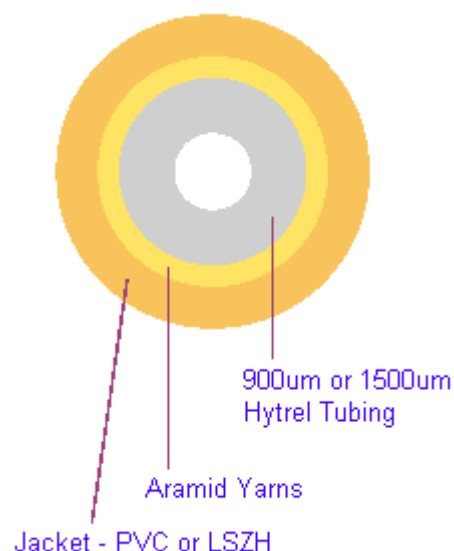

FiTek Photonics Corporation
<http://www.fitek.com.tw>
sales@fitek.com.tw

#266, Yung-Feng Rd., Bade,
 Taoyuan Hsien, 334 Taiwan
 Tel: +886-3-362-6789
 Fax: +886-3-375-2589