




FiTek Photonics Corporation [http : //www.fitek.com.tw](http://www.fitek.com.tw)
Tel : 886-3-3626789 Fax : 886-3-3752589

§ 2.0mm LSZH Jacket Fanout Tubing

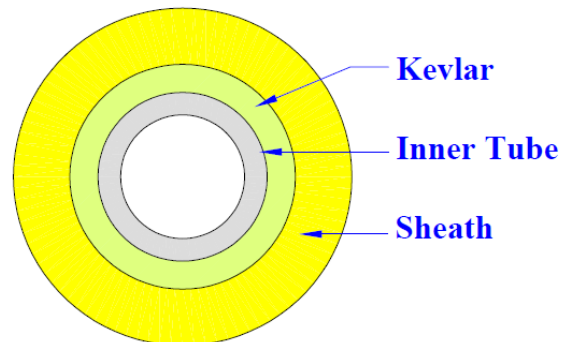

Specification

Inner Tube OD/ID, mm	1.5/ 1.1((± 0.1))
Material for Inner Tube	UL 94 HB Hytrel
Cable Diameter, mm	2.0 +/- 0.15
Kevlar	1100dtex * 3
Weight, kg/km	2.8
Max. Tensile Load - Load, N	200
Max. Tensile Load - Unload, N	100
Min. Bend Radius - Load, mm	40
Min. Bend Radius - Unload, mm	20
Applications	Protection of 250um bare fiber
Jacket Color	Yellow
Application Temperature	-20 ~ +70°C
Crush Resistance	40 N/cm
Impact Resistnce	10 Impacts
Cyclic Flex Resistance	500 Cycles
Shrinkage Percentage	≤4% (please noted that the shrinkage percentage is based on after an aging process at -20~+70°C for 48 hrs)