




FiTek Photonics Corporation
<http://www.fitek.com.tw>
info@fitek.com.tw

No. 266, Yungfeng Rd., Bade City,
 Taoyuan, 334 Taiwan
 Tel: +886-3-362-6789
 Fax: +886-3-375-2589

Zipcord Type Fanout Tubing

FiTek's Zipcord Fanout Tubing can provide superior extra protection for protection of 250um fibers and aramid strength member inside to enhance the cable strength. Outer jacket can be Flame-retardant PVC which meets the requirements of National Electrical Code (NEC article 770) and also meets the requirement of Green Policy in Europe countries.

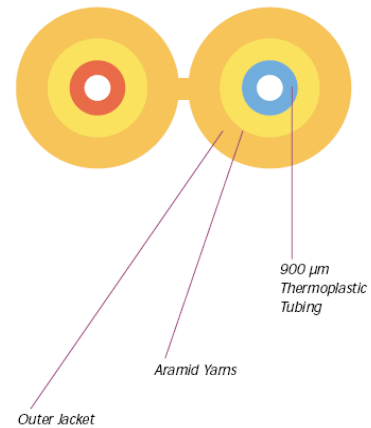

Specifications					
Inner Diameter of Buffer Tubing, um		500 ± 50			
Outer Diameter of Buffer Tubing, um		900 ± 50			
Material for Buffer Tubing		Hytel			
Cable Diameter, mm		1.6×3.7	2.0×4.2	2.4×5.0	2.9×6.0
Weight, kg/km		2.8	4.3	5.6	8.0
Max. Tensile Load	Load, N	80	200	400	400
	Unload, N	40	100	200	200
Min. Bend Radius	Load, cm	3.2	4.0	4.8	5.8
	Unload, cm	1.6	2.0	2.4	2.9
Applications		For the protection of 250 um fiber			
Jacket Color		Yellow, Orange or Aqua			
Application Temperature		PVC	-40 ~ +85°C		
		LSZH	-20 ~ +70°C		