




Fanout Cable Contain Hytrel Tubing with Pull String

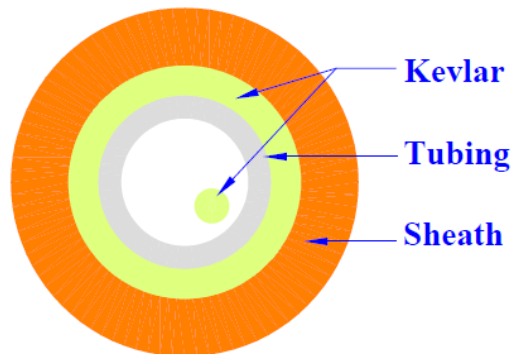

Specification

Inner Tube OD, mm	Inner Tube ID, mm	Outside Diameter, mm
Maximum 1.75	Minimum 1.0	2.9 ± 0.1
Sheath Material / Color		Inner Tube Material / Color
PVC / Yellow / Orange/ Blue / Black/RED		Hytrel / Natural

Mechanical Properties

		Standard
Storage Temperature	-40 to +85°C	IEC 60794-1-2 F1
Operating Temperature	-40 to +85°C	

Inner Tube Material Properties

Operating Temperature	-40 to +85°C
Storage Temperature	-20 to +60°C
Tube Shrinkage, %	≤ 1.5
Tensile Strength, MPa	45.6
Elongation, %	360
Coefficient of Friction	0.22
Heat Deflection Temp., °C	130
Brittleness Temperature, °C	< -70

Remark: Inner tube is not easy to pull out, but It is desirable that the sheath stripped 5 to 10 cm to connect the connector

These specifications are subject to change without prior notification.