




FiTek Photonics Corporation [http : //www.fitek.com.tw](http://www.fitek.com.tw)
Tel : 886-3-3626789 Fax : 886-3-3752589

φ2.9mm LSZH Jacket Furcation Tubing

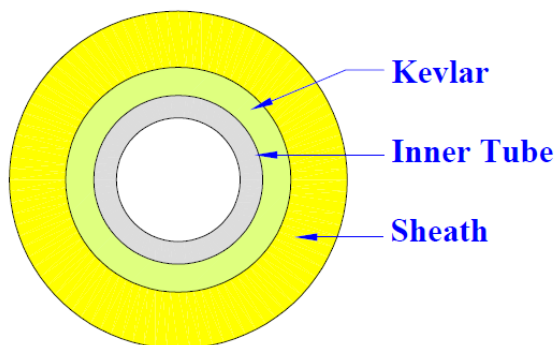

Specification

Inner Tube OD/ID, mm	2.0 / 1.8 (± 0.1)
Inner Tube Material	Hytrel
Outer Jacket Diameter, mm	2.9 (+/- 0.15)
Outer Jacket Material	LSZH
Strength Member	Kevlar
Jacket Color	Yellow/Aqua
Weight, kg/km	To be confirmed
Max Application Fiber Count	24
Max. Tensile Load - Load, N	100
Min. Bend Radius - Load, mm	40
Application Temperature	-20 ~ +70°C
Percentage of Shrinkage	$\leq 4\%$ (Shrinkage is tested under the condition of -20~+70°C for 48 hrs)